

Figure 1

200

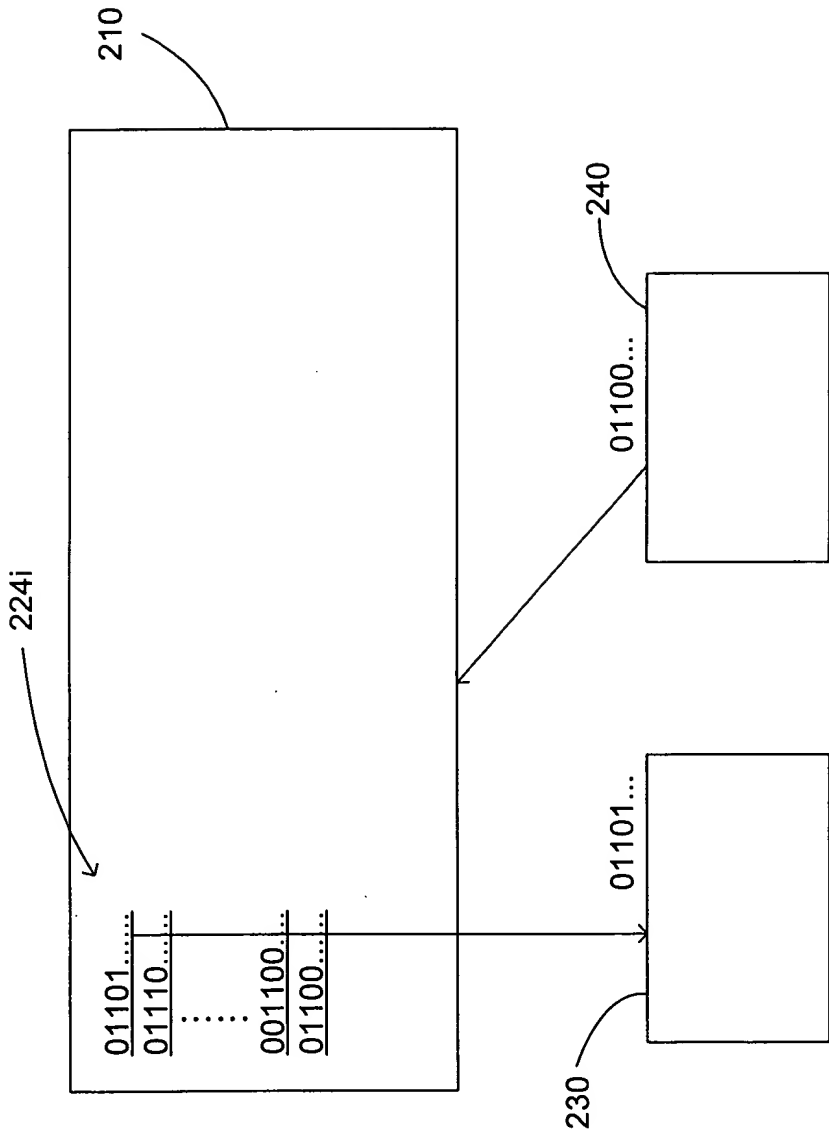


Figure 2

The diagram shows a vertical sequence of XML-like tags and attributes. At the top, the number 230 is positioned above the opening tag `<table width= "100%" cellpadding= "2" cellspacing= "0" border= "0" align= "center">`. An arrow labeled 304 points to the opening angle bracket of this tag. To the right, an arrow labeled 302 points to the closing angle bracket of the same tag. Below the opening tag is a vertical ellipsis (four dots). Then, the tag `<swe: information id= "91">` is shown, with an arrow labeled 308 pointing to its opening angle bracket. This is followed by another vertical ellipsis (four dots). Then, the tag `<swe: if condition= "xxx">` is shown, with an arrow labeled 312 pointing to its opening angle bracket. Finally, a third vertical ellipsis (four dots) appears at the bottom.

Figure 3

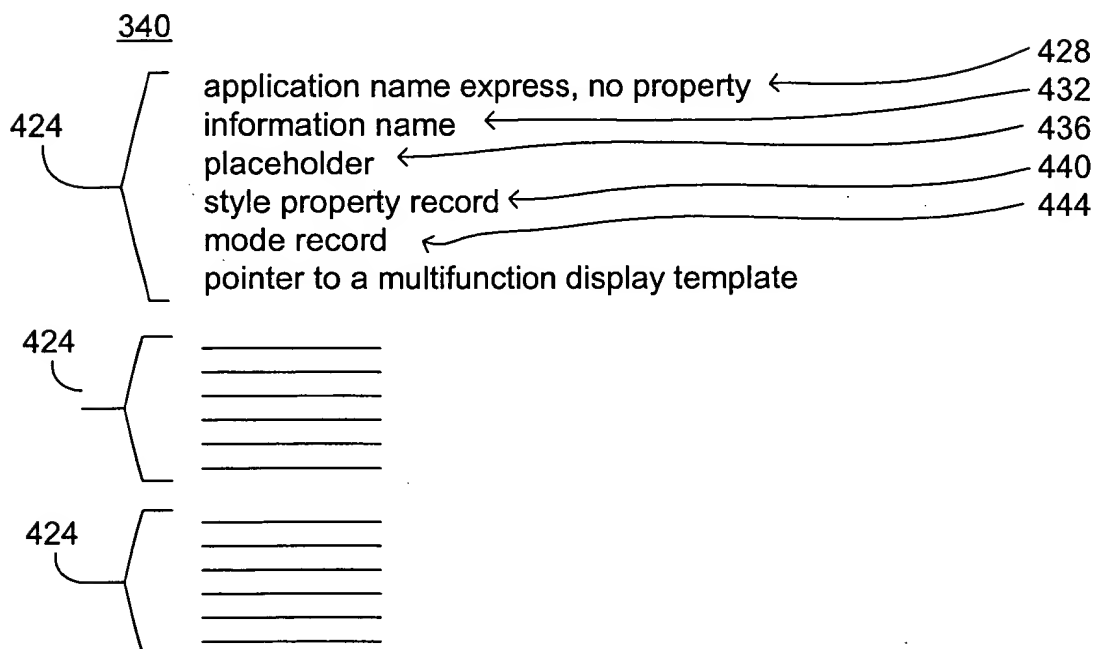


Figure 4

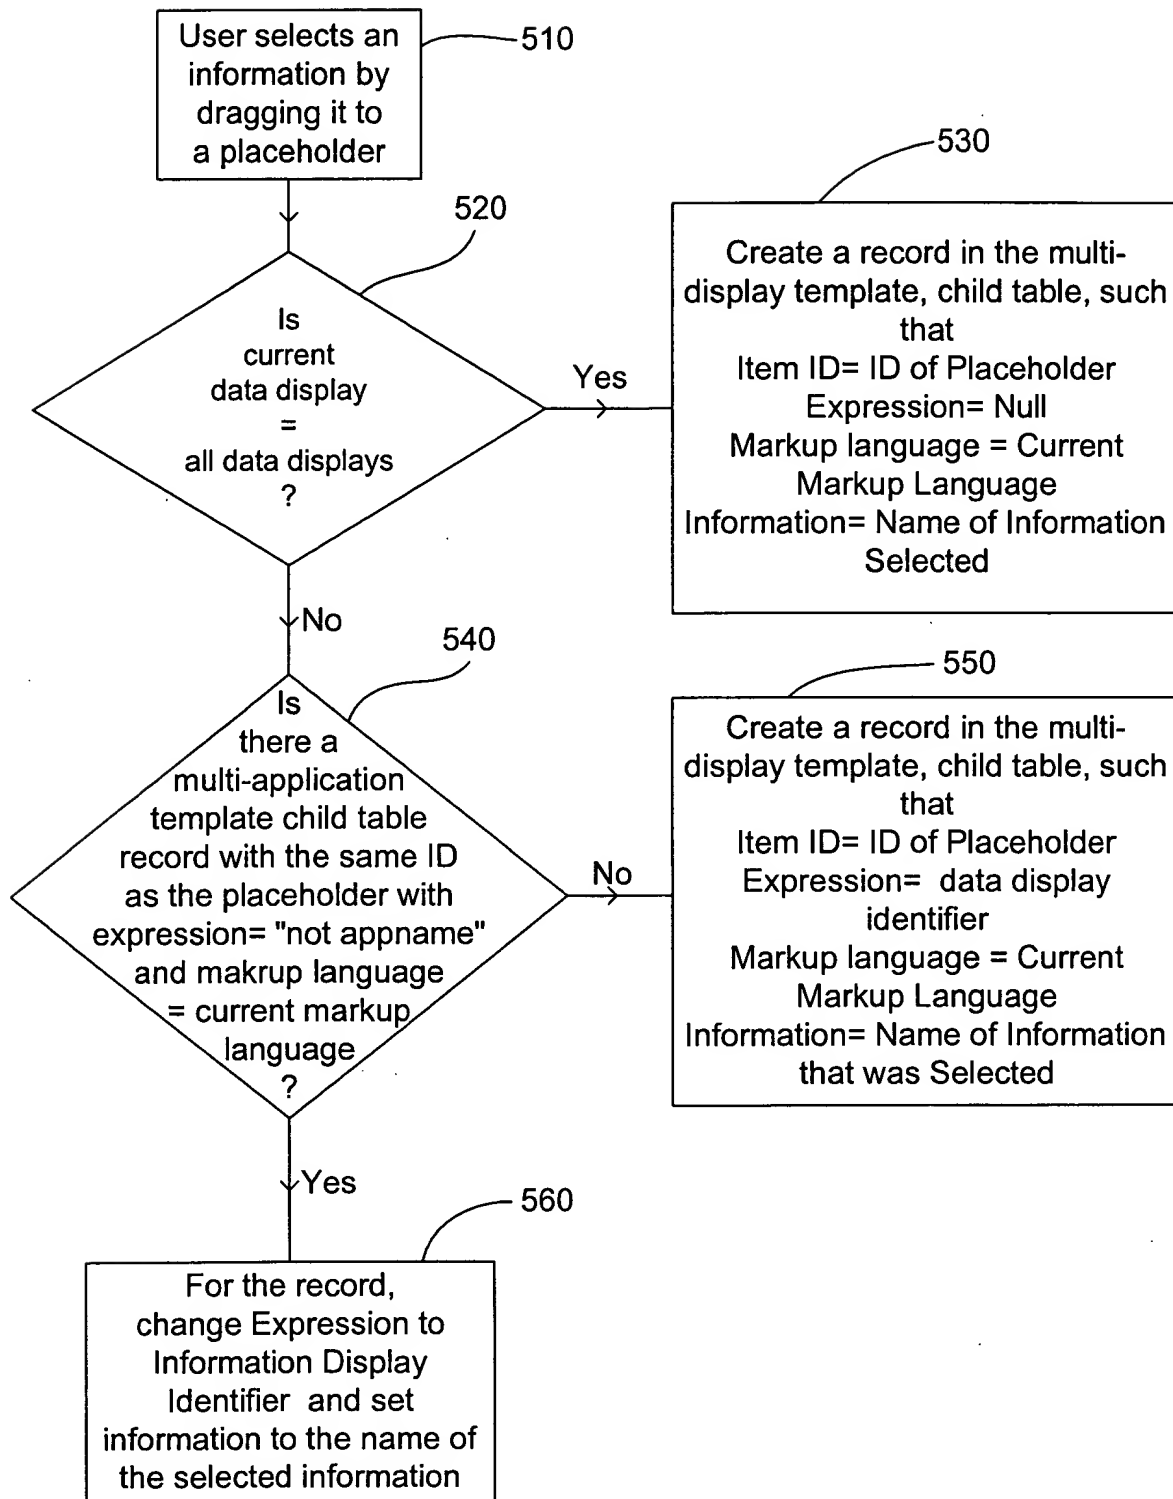


Figure 5

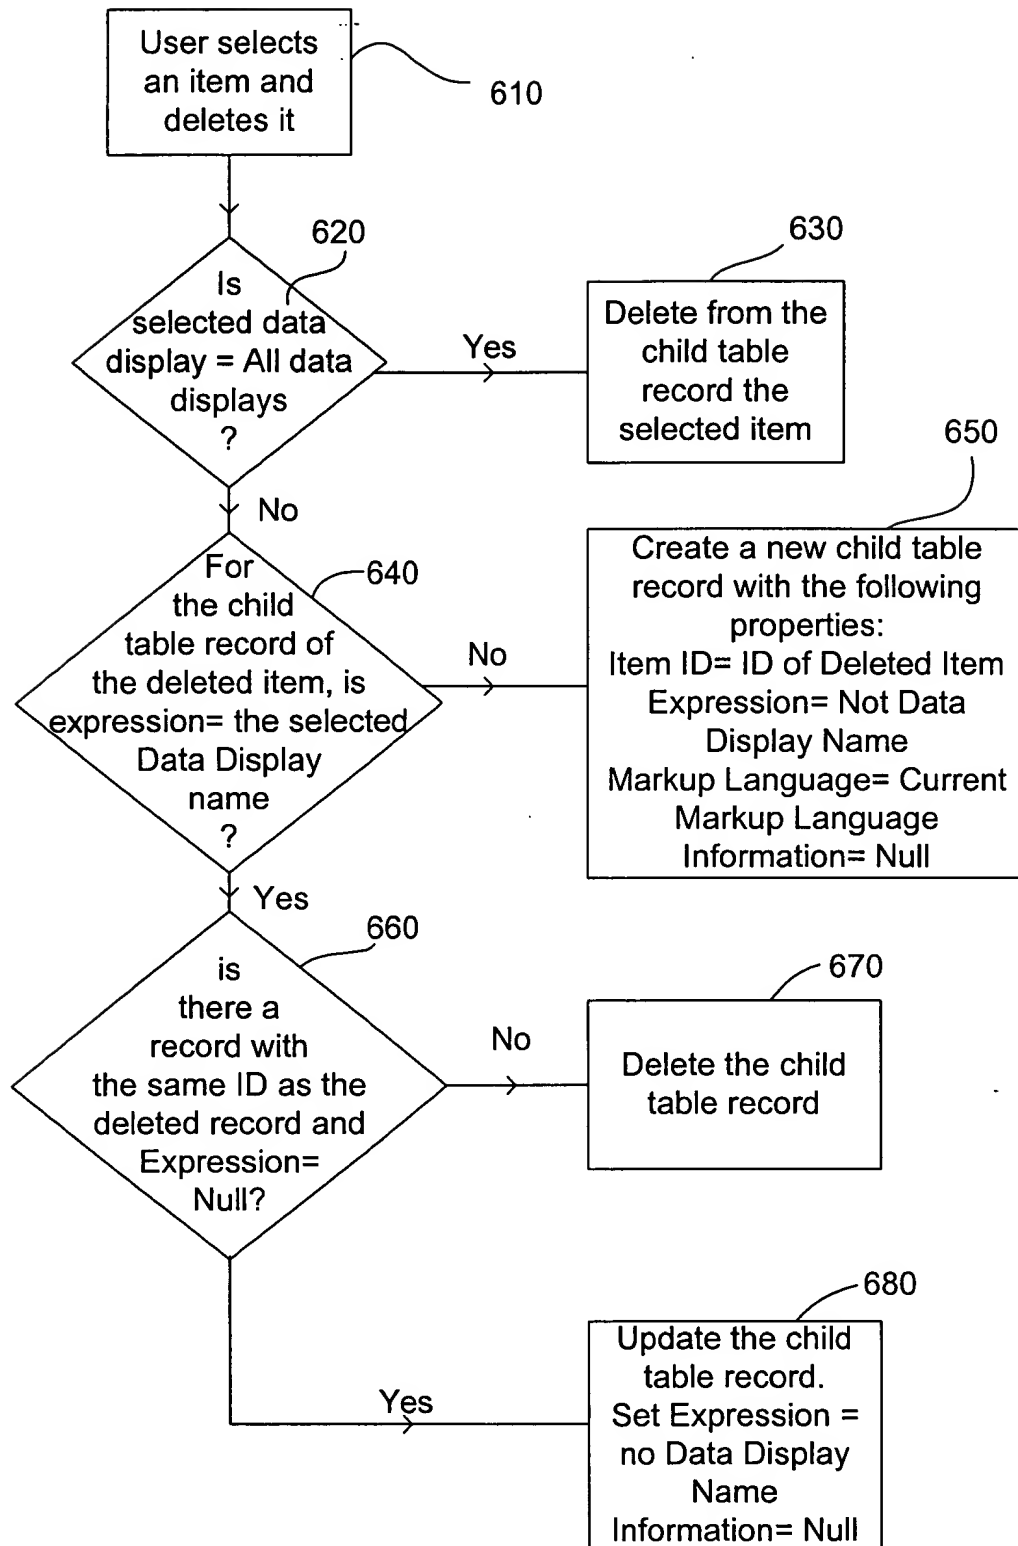


Figure 6

```

graph TD
    710[User selects modified Placeholder Position for Information by dragging Information from Placeholder 1 (PH1) to Placeholder 2 (PH2)] --> 720{is selected data display application = all data displays?}
    720 -- No --> 730[Follow steps for deleting an item from PH1 and creating a new item on PH2]
    720 -- Yes --> 740{is language override mode selected?}
    740 -- No --> 750[For the item that was selected, update the child table record, set Item ID from that of PH1 to that of PH2]
    740 -- Yes --> 760{is there a child table record for the current style for Information that was moved?}
    760 -- No --> 780[Create a new child table record for the moved information. For the new record, set the style to current style and Item, ID to ID of PH2]
    760 -- Yes --> 770[Change the ID in the child table record from PH1 to PH2]

```

Figure 7

```
graph LR; 810[User selects an information and sets it to more mode] --> 820[Child table record is updated by setting the mode to more]; 830[User selects an information and sets it to not more] --> 840[Child table record is updated by setting the mode to not more];
```

810 User selects an information and sets it to more mode

820 Child table record is updated by setting the mode to more

830 User selects an information and sets it to not more

840 Child table record is updated by setting the mode to not more

• •

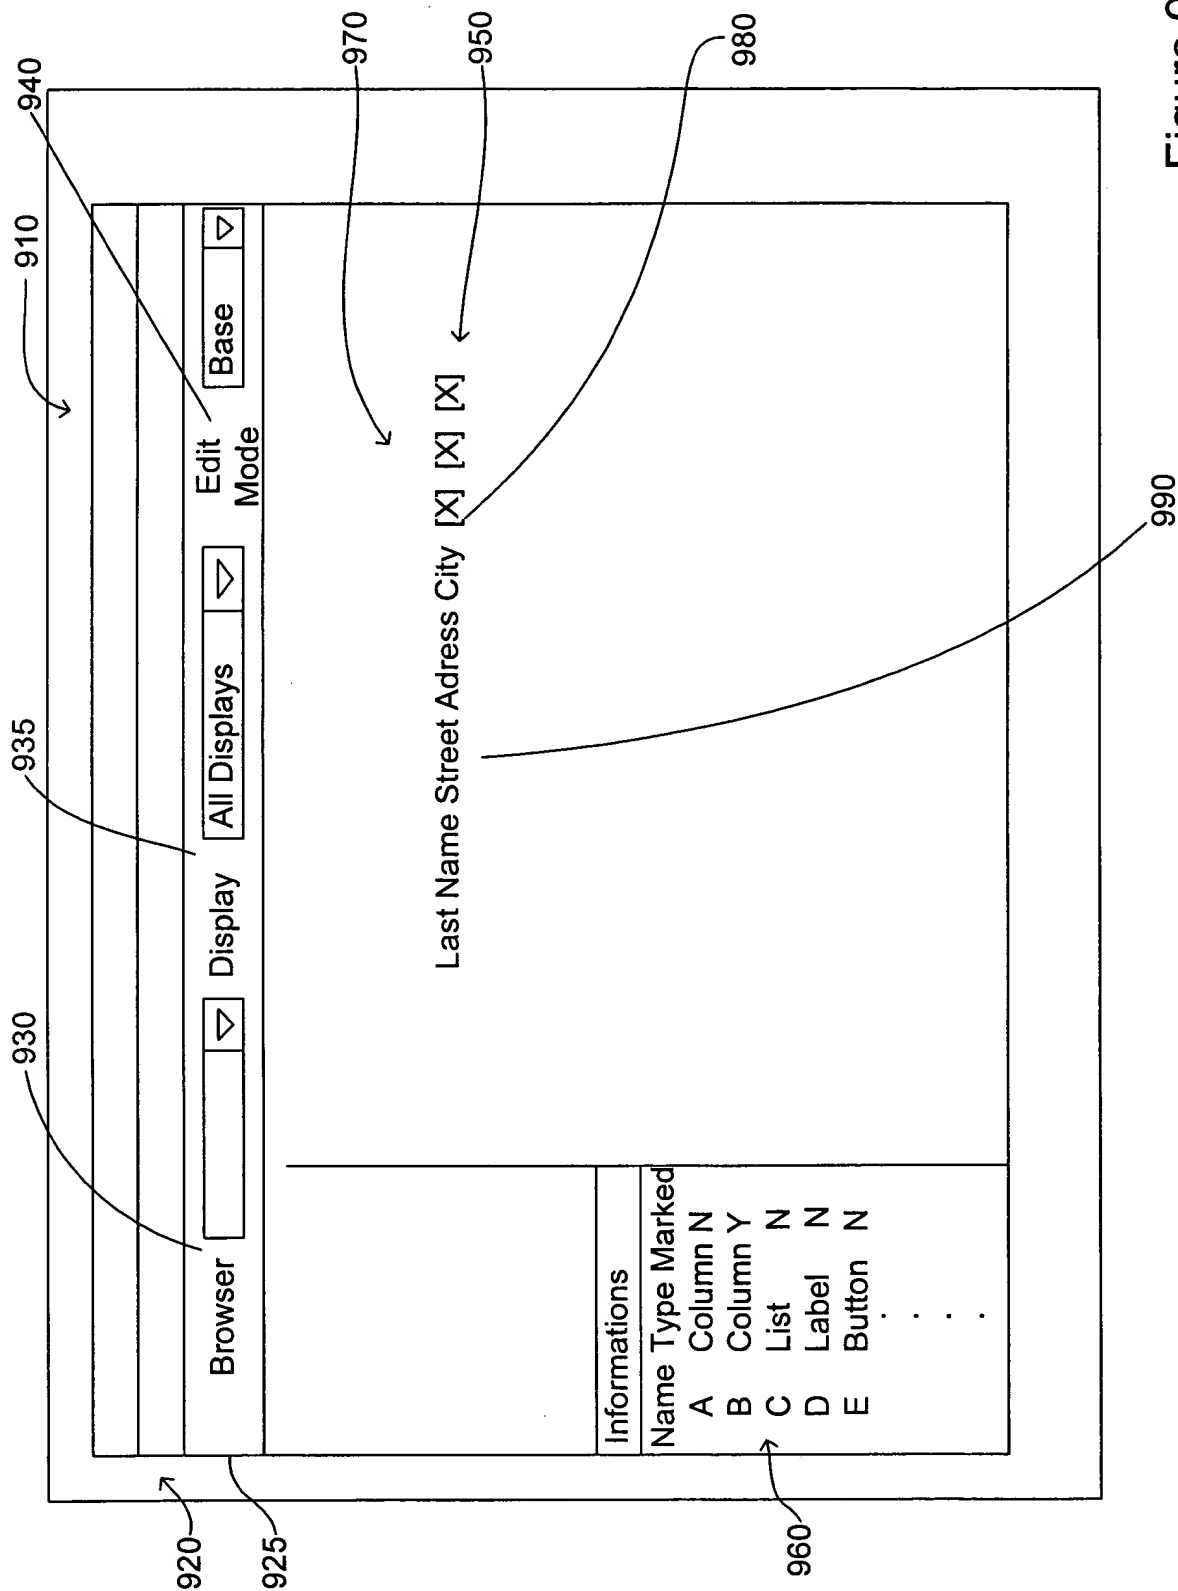


Figure 9

1004

1000

1054

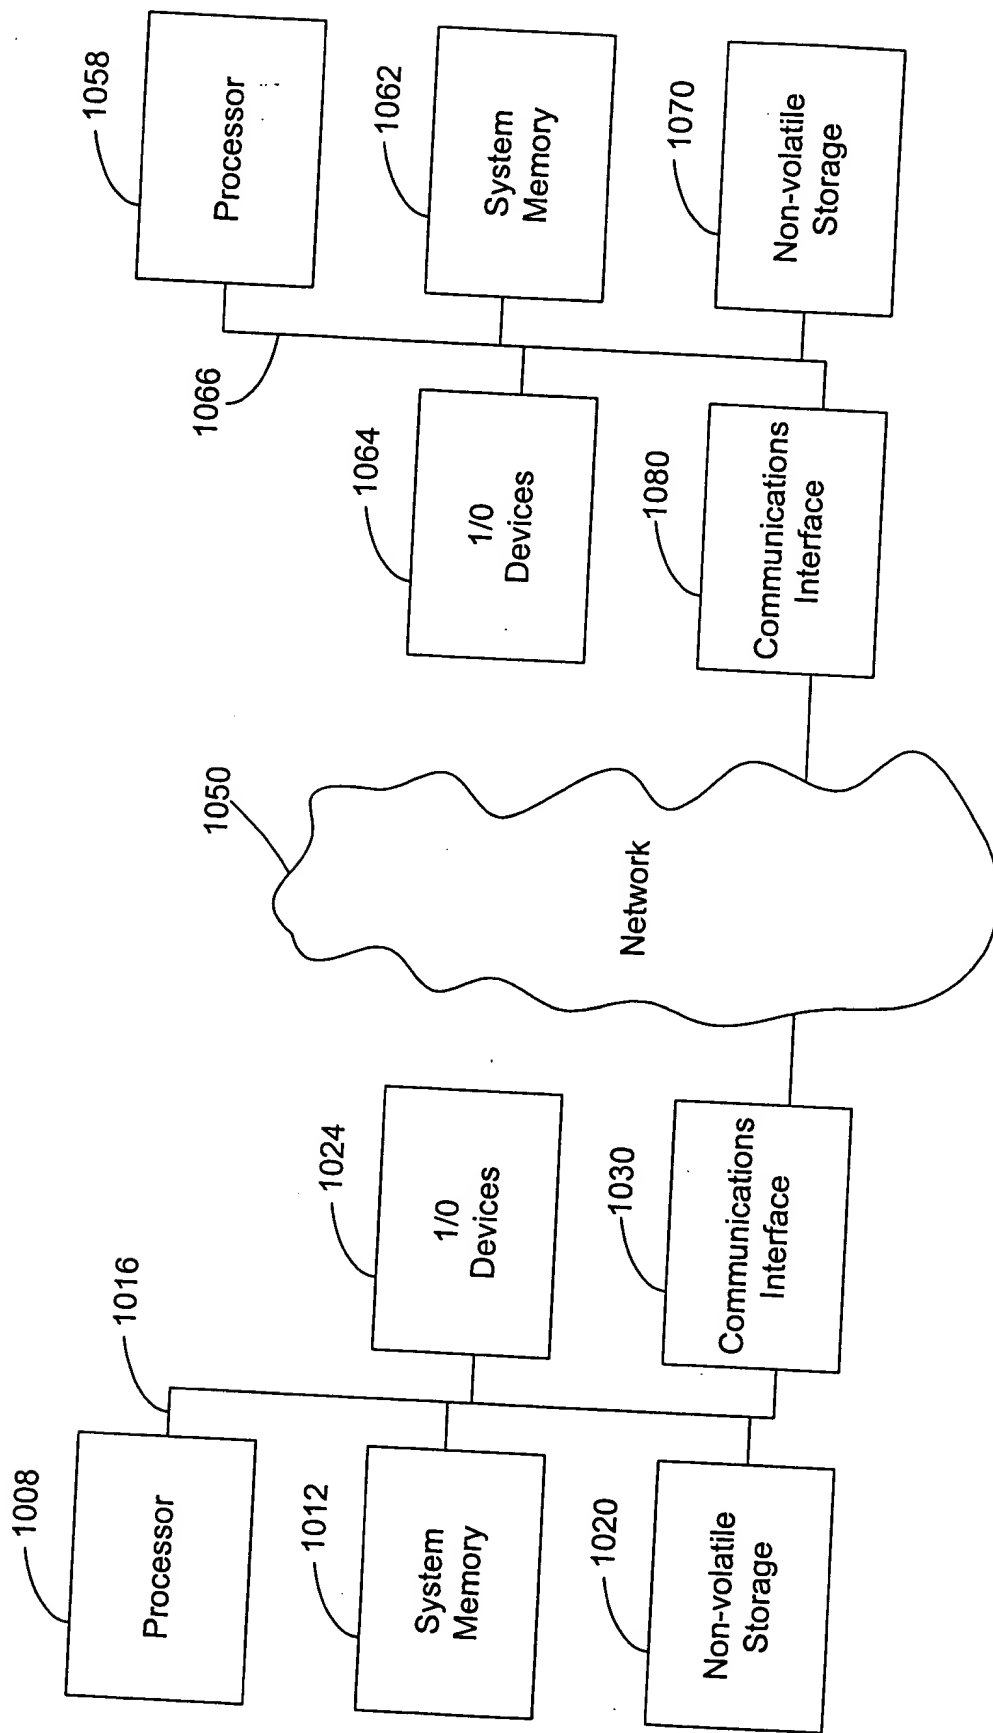


Figure 10